



L'Énergie Sans Limite !
Safe Energy for Life !

Electrical Protection Catalog 2025



Manufacturer of electrical, electronic and IT protection solutions



Unlimited Power

For over 30 years, INFOSEC Communication SAS, a French company based near Nantes, has been **a globally recognized player** in the field of electrical security and **uninterruptible power supply (UPS) systems**. It designs and offers electrical, electronic and IT protection solutions tailored to **the needs of both professionals and private users**. Its solutions are used across a wide range of sectors including **home and multimédia environments**, IT and networks infrastructure, as well as industrial and **medical equipment**.



INFOSEC UPS SYSTEM™ is a specialist in Uninterruptible Power Supplies (UPS) and protection solutions for electrical, IT and electronic equipment. Its UPS systems ensure **stable power supply**, **protecting against outages, surges and voltage fluctuations**. They help **extend equipment lifespan**, **reduce energy consumption and optimise energy efficiency**.

Thanks to its **dedicated, passionate and committed** teams, INFOSEC UPS SYSTEM™ is proud to offer each **tailored customer solutions** that meet their specific needs.

A key strength of the company lies in its After-Sales Service, based in France, which guarantees **high-quality** support for installation, troubleshooting and maintenance. This ensures optimal **performance** and **availability** of protected equipment and investments.

INFOSEC UPS SYSTEM™ places **people** and **customer satisfaction** at the heart of its priorities.

Contents

INFOSEC's commitment	04
Selection guide	08
Innovation	10
UPS	11
Digital leisure & private branch exchange - Home and SMEs Z1 ZenCube EX / Z2 EX / Z3 ZenBox EX	12
Digital leisure & IT - Home and SMEs Zen Live / Zen-X MASTER NEW	15
IT - SMEs X1+ FR/Schuko & IEC / X3 EX LCD USB / X4 RM +	17
Corporate networks & sensitive applications - Service sector and SMEs E2 LCD / E3 EVO NEW / E3 PERFORMANCE / E3 PRO	20
Networks & sensitive applications - Industrial environments E7 One RT / E4 Value / E4 Pro One TM / E4 LCD Pro TM	24
Sensitive & critical applications - Industrial and medical sectors M5T / M5T HD / M6Ti / M6Ti TX / Mod3 / Mod5T / Mod5T E	28
PV systems & backup time - Commercial environments G1 / G1 Solar MPPT	34
Accessories Communication solution / SNMP agent / PDU / External maintenance bypass / ATS / Smart Charger S	35
Regulators R1 USB	44
Contacts	46

INFOSEC's Commitment

INFOSEC UPS SYSTEM™ has developed a range of products with a common mission : giving **everyone access to the energy they need** for their equipment and activities, at the right time, with the required level of quality, and the lowest possible environmental impact.
With INFOSEC UPS SYSTEM™ solutions, unlimited **energy is accessible to all**, and **resources are sustainably preserved**.

Certified Company

Since 2007, INFOSEC has demonstrated its commitment to quality and the environment through its **ISO 14001** and **ISO 9001** certifications. These certifications reflect the effectiveness of its processes, its continuous focus on customer satisfaction and its dedication to building long-term partnerships. In 2024, the company adopted a **Corporate Social Responsibility (CSR)** approach, ethically integrating the social and environmental impact of its decisions into its overall strategy.

EcoVadis® Recognition

In January 2025, INFOSEC UPS SYSTEM™ ranked among the top 35% of companies assessed by EcoVadis, an international platform that evaluates corporate performance in sustainability and corporate social responsibility. This recognition reflects the company's ongoing efforts to integrate **responsible practices** into all aspects of its operations.

INFOSEC's approach focuses on the following areas of improvement :


- Measuring and reducing its carbon footprint
- Conducting Life Cycle Assessments (LCA) and creating Product Environmental Profiles (PEP)
- Involving stakeholders in an eco-responsible approach and selecting environmentally committed suppliers
- Optimising the impact of distribution networks and delivery methods
- Developing and promoting a range of refurbished and second-hand products



To find out more



Choose right, protect better

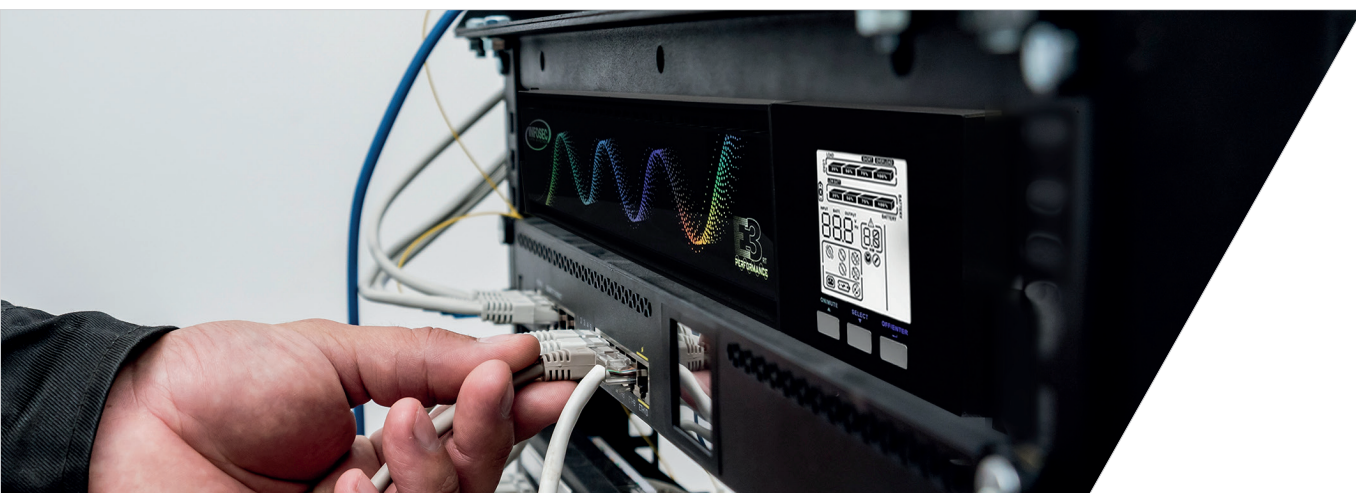

Why choose an INFOSEC UPS ?

06

Technology guide

07

UPS selection guide

08

INFOSEC UPS System, the right choice.

Choosing an INFOSEC UPS means opting for **reliability**, **performance** and **peace of mind**.

The UPS provides optimal protection against power cuts, surges and other electrical disturbances. Its design ensures a stable and continuous power supply for all types of equipment from domestic use **to highly sensitive environments such as medical facilities, data centers or industrial sites.**

By choosing the INFOSEC UPS SYSTEM™ brand, you not only **secure** your installations but also benefit from long-lasting peace of mind, thanks to **high-quality** products and **dedicated, personalized support**.

Moreover, the company is committed to delivering solutions that combine **safety** and **energy efficiency**.




Uninterruptible Power Supply

In the event of a power outage, the UPS instantly takes over, ensuring an uninterrupted power supply. It allows users or systems to continue operating, save ongoing work, and prevent any loss of critical data.




Equipment Protection

Electrical disturbances such as frequency variations or voltage dips can seriously damage equipment and compromise data integrity. INFOSEC UPS systems are designed to filter and regulate voltage, ensuring effective protection of your devices and extending their lifespan.

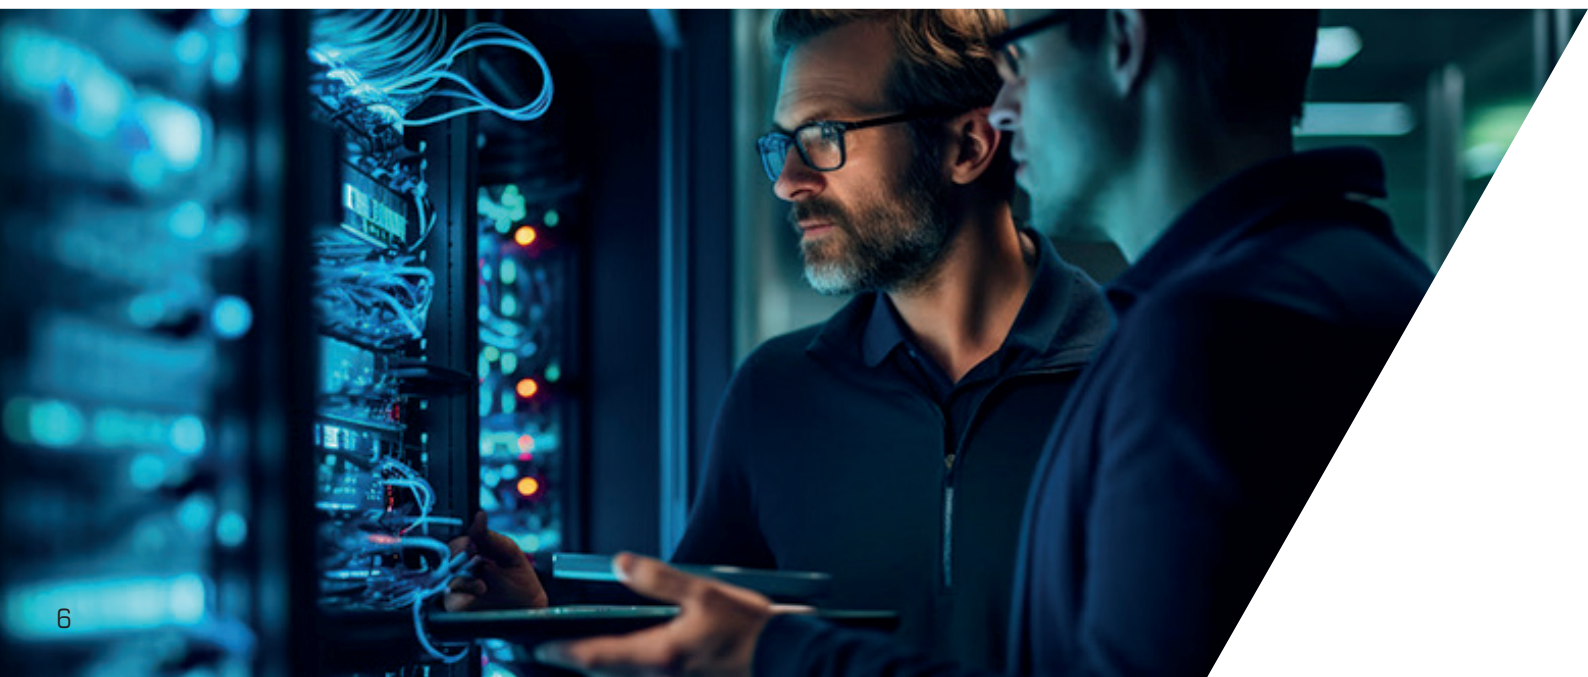


Technology guide

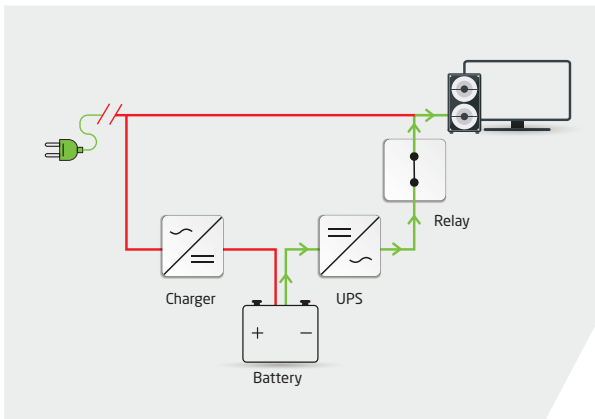


High Frequency Technology :

UPS takes over in the event of a power cut or significant drop in mains voltage. The battery is systematically recharged as soon as mains power is available.

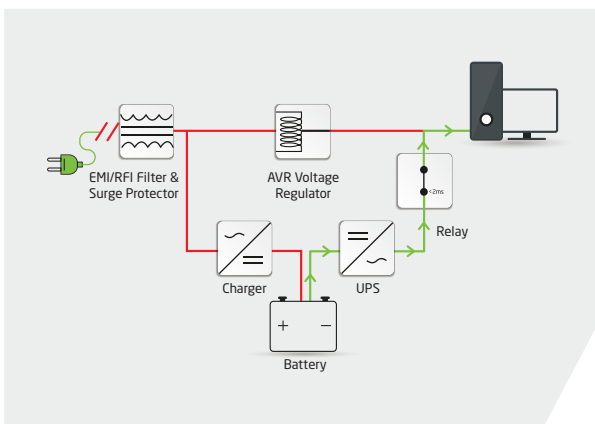


Line Interactive Technology :

UPS controls and filters the input voltage to provide a better quality current. A **voltage regulator** manages major variations without putting any **strain on the batteries**, thereby preserving their lifespan. A **filter and a surge protector** reinforce the safety of the equipment.

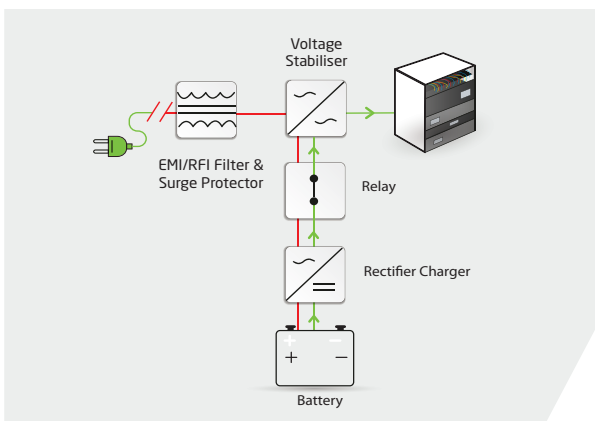

On Line Performance Technology :

On Line Performance Technology offers a level of protection close to On Line Double Conversion technology. The voltage delivered is **automatically regulated** to provide a **perfect sinusoidal signal**, whether the UPS is in mains or battery mode.

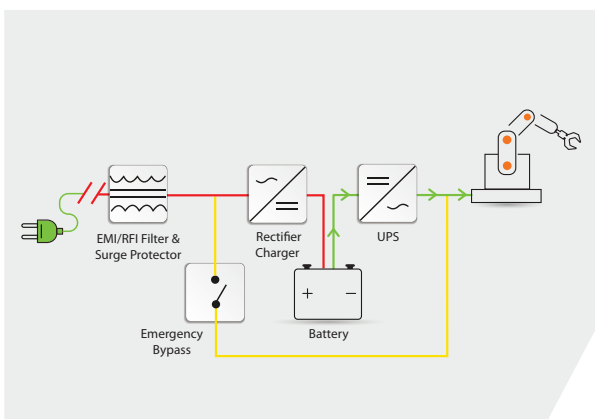

On Line Double Conversion Technology :

UPS delivers a **continuous, interference-free power supply**, making the device **independent of the mains** and eliminating power outages thanks to zero transfer time. On Line UPS offer the most **stable voltage** and **excellent protection against interference**.

UPS selection guide :

APPLICATIONS											
Digital leisure & Private Branch Exchange (PBX)			PCs, IT for small businesses						Business networks	Tertiary business networks	
Z1 Zen Cube EX	Z2 EX	Z3 ZenBox EX	Zen Live	Zen-X Master	X1+	X3 LCD USB EX	X4 RM Plus		E2 LCD	E3 EVO	E3 Performance
											
Format	Tower	Tower	Tower	Tower	Tower	Tower	Tower	Rack	Tower	Rack & Tower	Tower & Rack
Technology	High Frequency			Line Interactive						On Line Performance	
Outlets	FR/Schuko	FR/Schuko	FR/Schuko	FR/Schuko	FR/Schuko	IEC	FR/Schuko	FR/Schuko	IEC & FR/Schuko	IEC	IEC
Power											
400 VA	66072										
500 VA			66074	66081		66111	66105	65965		67036	
550 VA		66085									
600 VA	66073				66124				66061	65348	
650 VA				66082				65966			
700 VA		66086	66075			66112	66106				
750 VA										67037	
800 VA				66083	66125			65967	66062	65349	67023
1000 VA		66087	66076	66084	66126	66113	66107	65968	66063	65350	
1100 VA											67024
1200 VA								65969		67038	
1250 VA											
1300 VA						66114	66108				
1500 VA										65351	67025
1600 VA						66115	66109	65970			
2000 VA								65971	66064	65352	67026
2200 VA						66116	66110			67039	
2500 VA											67027
3000 VA								66080	66065	67040	67028
4000 VA											
5000 VA											67035
6000 VA											
8000 VA											
10 kVA											
15 kVA											
20 kVA											
30 kVA											
40 kVA											
60 kVA											
80 kVA											
90 kVA											
100 kVA											
120 kVA											
150 kVA											
180 kVA											
200 kVA											
210 kVA											
240 kVA											
300 kVA											
420 kVA											
500 kVA											
600 kVA											
→ 1200 kVA	Several configurations are possible, please contact us										

Networks & sensitive applications, industrial environments							Critical applications, industrial & medical environments			Data Centers Critical applications	
E3 Pro	E7 One RT	E4 VALUE	E4 Pro One TM	E4 LCD Pro TM	M5T Tri/Tri		Mod3	M6Ti	M6Ti TX	Mod5T Tri/Tri	Mod5T E Tri/Tri
Tower & Rack	Tower & Rack	Tower	Tower	Tower	Tower		Tower & Rack	Tower	Tower	Tower	Tower
On Line Double Conversion							On Line Double Conversion			On Line Double Conversion	
IEC and/or terminal block		IEC and/or terminal block	IEC and/or terminal block	IEC/FR Schuko or terminal block	Block	IEC and/or terminal block	Modular UPS Bornier *		Bornier	Modular UPS Bornier	
RM	RT						TT	TM			
67314	67308	67333	67417	67689							
		67334	67425	67690							
	67309	67335	67418	67691							
	67310	67336	67419	67692							
			67426								
	67319	67346	67420	67629							
	67320	67337	67656	67630							
		67347		67631							
	67321	67338	67321	67632	67508	67658	67725	67727			
					67509	67659					
					67517	67660					
						67661					
						67662					
						67663		69309	69310		67708 67710
								69311	67314	67703	
										67701	67709 67711
						67664		69301	69305		
						67765		69302	69306	67702 67704 67705	
						67688		69303	69307	67706	
						67766					
						67665		69304	69308		
										67707	
								69312		67738	
								69313		67739	
										67740	
										67741	
										67742	
Several configurations are possible, please contact us											

Innovation



Energy Storage

WATTSON

New range of **energy storage solutions** : power and reliability for professionals and consumers alike.
Discover innovative products designed to meet all your energy needs!



WATTSON Moov 1200/2500



WATTSON Moov 3000

Scan the QR Code to browse our
Wattson range catalogue!



UPS



Digital leisure & private branch exchange - **Home and SMEs**

12

Digital leisure & IT - **Home and SMEs**

15

IT - **SMEs**

17

Corporate networks & sensitive applications - **Service sector and SMEs**

20

Networks & sensitive applications - **Industrial environments**

24

Sensitive & critical applications - **Industrial and medical sectors**

28

PV systems & long backup time - **Commercial environments**

34

Digital leisure & private branch exchange

The Z1 ZenCube EX 400 & 600 VA UPS offer **reliable, discreet protection** for your IT equipment and home electronics.



High Frequency
Technology



3 FR/Schuko
outlets



Wall mounting



Backup time :
up to 8 min*



Z1 ZenCube EX 400/600 VA

Key points

- High Frequency Technology
- Backup time : up to 8 min*
- 3 FR/Schuko outlets
- Cold start possible if mains power is absent
- Wall mounting possible



Z1 ZenCube EX 400/600 VA

1. Integrated power cable
2. FR/Schuko outlets
3. Thermal fuse
4. On/Off button

Z1 ZenCube EX 400	Z1 ZenCube EX 600
66072	66073

General Specifications

Power (VA/W)	400 VA/200 W	600 VA/300 W
Technology	High Frequency	
Backup time (at 50% load)*	7 min	8 min
Input voltage	220/230/240 VAC	
Output voltage	220/230/240 VAC	
Dimensions (L x W x H) (mm)	166 x 161 x 86.7	

Connection

Electrical output	3 FR/Schuko outlets
-------------------	---------------------

Sales Information

Warranty	2 years
----------	---------

*Depending on the model and the connected load

To find out more



Digital leisure & private branch exchange

The Z2 EX range of UPS has been designed to offer your PCs and digital entertainment equipment appropriate protection against power supply problems and electrical disturbances in a domestic configuration.



High Frequency Technology



6 FR/Schuko outlets



USB remote control software



Wall mounting




Backup time :
up to 8 min*



Z2 EX 550/700/1000 VA

Key points

- High Frequency Technology
- Backup time : up to 8 min*
- 3 FR/Schuko outlets
- 3 FR/Schuko outlets with lightning protection
- USB HID port for automatic closure management
- Cold start possible if mains power is absent

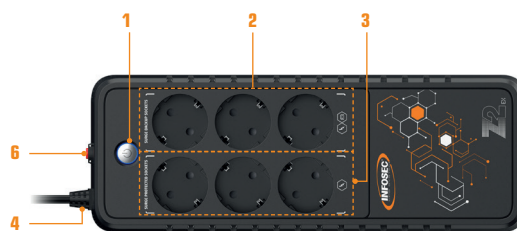

Z2 EX 550/700/1000 VA

1. On/Off button - Blue indicator light
2. 3 back-up FR/Schuko outlets
3. 3 protected FR/Schuko outlets



4. Integrated power cable
5. USB communication port (HID)
6. Input circuit breaker

General Specifications

	Z2 EX 550	Z2 EX 700	Z2 EX 1000
	66085	66086	66087
Power (VA/W)	550 VA/275 W	700 VA/360 W	1000 VA/500 W
Technology	High Frequency		
Backup time (at 50% load)*	7 min	8 min	6 min
Input voltage	220/230/240 VAC		
Output voltage	220/230/240 VAC		
Dimensions (L x W x H) (mm)	309 x 110 x 90		

Connection

Electrical output	6 FR/Schuko outlets
--------------------------	---------------------

Management/Communication

Port	USB HID
-------------	---------

Sales Information

Warranty	2 years
-----------------	---------

*Depending on the model and the connected load

To find out more



Digital leisure & private branch exchange

The Z3 ZenBox EX range of inverters has been designed to provide PCs and digital entertainment equipment with tailored, **compact protection** against **power problems** and **electrical disturbances** from 6 to 8 devices.



High Frequency Technology



6 to 8 FR/Schuko outlets



USB remote control software



Wall mounting



Backup time :
up to 8 min*



Z3 ZenBox EX 700/1000 VA



Key points

- High Frequency Technology
- Backup time : up to 8 min*
- 6 to 8 FR/Schuko outlets
- USB port for automatic closing management
- Phone line/network protection



Z3 ZenBox EX 700/1000 VA



Z3 ZenBox EX 700/1000 VA

1. Integrated power cable
2. Fuse
3. 3 protected FR/Schuko outlets
4. 3 backup protected FR/Schuko outlets
5. Phone line/network protection (In/Out)
6. USB Port
7. 1 protected French outlets (700 and 1000 VA models)
8. 1 French uninterruptible power supply (700 and 1000 VA models)

Z3 ZenBox EX 500	Z3 ZenBox EX 700	Z3 ZenBox EX 1000
66074	66075	66076

General Specifications

Power (VA/W)	500 VA/240 W	700 VA/360 W	1000 VA/480 W
Technology	High Frequency		
Backup time (at 50% load)*	8 min	7 min	8 min
Input voltage	220/230/240 VAC		
Output voltage			
Dimensions (L x W x H) (mm)	230 x 200 x 92,5		

Connection

Electrical outlet	6 FR/Schuko outlets	8 FR/Schuko outlets	8 FR/Schuko outlets
Phone & network input/output	RJ11/45		

Management/Communication

Port	USB		
------	-----	--	--

Sales Information

Warranty	3 years		
----------	---------	--	--

*Depending on the model and the connected load

To find out more



Digital leisure & IT - Home and SMEs

Zen Live UPS offer **essential protection** against power problems and **electrical disturbances** for IT equipment, whether in domestic or commercial environment.



Line Interactive
Technology



4 FR/Schuko
outlet



Wall mounting



Backup time :
up to 10 min*



Zen Live 500/650 VA

Key points

- Line Interactive Technology
- Backup time : up to 10 min*
- 4 FR/Schuko outlets
- Wall-mounting system
- Output voltage regulation



Zen Live 500/650 VA

1. Integrated power cable
2. Secured FR/Schuko outlets



Zen Live 800/1000 VA

3. Circuit breaker
4. ON/OFF button

Zen Live 500	Zen Live 650	Zen Live 800	Zen Live 1000
66081	66082	66083	66084

General Specifications

Power (VA/W)	500 VA/300 W	650 VA/390 W	800 VA/480 W	1000 VA/600 W
Technology	Line Interactive			
Backup time (at 50% load)*	5 min	10 min	10 min	10 min
Input voltage	220/230/240 VAC			
Output voltage				
Dimensions (L x W x H) (mm)	245 x 163 x 90		292 x 199 x 91	

Connection

Electrical output	4 FR/Schuko outlets
-------------------	---------------------

Sales Information

Warranty	2 years
----------	---------

*Depending on the model and the connected load

To find out more



New!

NEW

Digital leisure & IT - Home and SMEs

The Zen-X Master range protects IT and multimedia equipment from **power cuts** and surges and includes a smart **Eco function**.



Line Interactive
Technology



8 outlets
FR/Schuko



USB chargers



Eco Mode



USB control
software



Backup time :
up to 8 min*




Zen-X Master

Key points

- Line Interactive Technology
- 8 protected FR/Schuko outlets, 6 of which are battery-backed
- Energy-saving function
- 2 USB chargers
- Phone line/network protection
- USB port for automatic shutdown management
- Battery easily replaceable by user



1. Master outlet
2. Eco (Slave) outlet
3. 6 protected and uninterruptible outlet
4. 2 protected outlet
5. Circuit breaker
6. Power cable
7. USB communication port
8. RJ11/45 port
9. Chargers USB ports A and C
10. Audible alarm setting
11. ON/OFF button

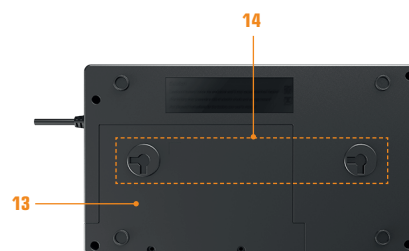

12. LCD display
13. Battery slot
14. Wall mounting system

General Specifications

	Zen-X Master 600	Zen-X Master 800	Zen-X Master 1000
	66124	66125	66126
Power (VA/W)	600 VA/360 W	800 VA/480 W	1000 VA/600 W
Technology	Line Interactive		
Backup time (at 50% load)*	8 min	6 min	8 min
Input voltage	220/230/240 VAC		
Output voltage	220/230/240 VAC		
Dimensions (L x W x H) (mm)	288 x 166 x 118		
USB charger	USB type A and USB type C		

Connection

Electrical output	8 FR/Schuko sockets (including 2 protected and 6 protected and backed-up)
Phone & network input/output	RJ11/45

Management/Communication

Port	USB (free software download)
------	------------------------------

Sales Information

Warranty	2 years
----------	---------

*Depending on the model and the connected load



To find out more



IT - SMEs

The X1+ range of UPS has been designed to **protect** personal and business computing from **power problems** and **dangerous electrical disturbances**.



Line Interactive Technology



FR/Schuko or IEC outlets



USB remote control software



Backup time :
up to 10 min*



X1+ 1200/1600/2200 VA



Key points

- Line Interactive Technology
- Backup time : up to 10 min*
- 2 to 4 FR/Schuko outlets or 4 to 6 IEC outlets
- USB port for automatic shutdown management
- Cold start possible if mains power is absent



X1+ FR/Schuko
500/700/1000 VA



X1+ IEC 1300/1600/2200 VA

1. Integrated power cable
2. Circuit breaker
3. Backup FR/Schuko outlets
4. Backup IEC outlets
5. USB communication port (type B)

	X1+ 500	X1+ 700	X1+ 1000	X1+ 1300	X1+ 1600	X1+ 2200
FR/Schuko outlets	66105	66106	66107	66108	66109	66110
IEC outlets	66111	66112	66113	66114	66115	66116

General Specifications

Power (VA/W)	500 VA/300 W	700 VA/360 W	1000 VA/500 W	1300 VA/720 W	1600 VA/900 W	2200 VA/1320 W
Technology	Line Interactive					
Backup time (at 50% load)*	8 min	10 min	10 min	10 min	8 min	8 min
Input voltage	220/230/240 VAC					
Output voltage	220/230/240 VAC					
Dimensions (L x W x H) (mm)	286 x 96 x 138			298 x 148 x 179		

Connection

Electrical output (FR/Schuko model)	2 FR/Schuko outlets	4 FR/Schuko outlets
Electrical output (IEC model)	4 IEC outlets	6 IEC outlets

Management/Communication

Port	USB
------	-----

Sales Information

Warranty	2 years
----------	---------

* Depending on the model and the connected load

To find out more



IT - SMEs

The X3 UPS range has been designed to offer servers and professional IT equipment reliable, **high-performance protection** against power problems and dangerous electrical disturbances.



Line Interactive Technology



2 to 4 FR/Schuko outlets



USB remote control software



Backup time :
up to 45 min*



X3 EX 1200 VA

Key points

- Line Interactive Technology
- Backup time : up to 45 min*
- 2 to 4 FR/Schuko outlets
- USB port for automatic closing management
- Equipped with LCD display



X3 EX 1600/2000 LCD USB

1. Power outlets
2. Backup FR/Schuko outlets
3. Fuse
4. USB communication port

X3 EX 500 LCD USB	X3 EX 650 LCD USB	X3 EX 800 LCD USB	X3 EX 1000 LCD USB	X3 EX 1200 LCD USB	X3 EX 1600 LCD USB	X3 EX 2000 LCD USB	X3 EX 3000 LCD USB
65965	65966	65967	65968	65969	65970	65971	66080

General Specifications

Power (VA/W)	500 VA/ 240 W	650 VA/ 360 W	800 VA/ 480 W	1000 VA/ 480 W	1200 VA/ 600 W	1600 VA/ 900 W	2000 VA/ 1200 W	3000 VA/ 1800 W
Technology	Line Interactive							
Backup time (at 50%/70% load)*	12 min/ 7 min	11 min/ 6 min	18 min/ 12 min	17 min/ 10 min	35 min/ 15 min	40 min/ 18 min	42 min/ 20 min	45 min/ 25 min
Input voltage	220/230/240 VAC							
Output voltage								
Dimensions (L x W x H) (mm)	287 x 100 x 142				350 x 146 x 160	397 x 145 x 205		495 x 150 x 250

Connection

Electrical output	2 FR/Schuko outlets	4 FR/Schuko outlets
Phone & network input/output	RJ11/45	

Management/Communication

Port	USB
------	-----

Sales information

Warranty	3 years
----------	---------

*Depending on the model and the connected load



IT - SMEs

The X4 RM Plus range of UPS is dedicated to the **electrical protection** of **IT networks** and **loads** against power supply problems and electrical disturbances in 19" rack.



Line Interactive Technology



19" rack mounting



IEC + FR/Schuko outlets



USB remote control software



Backup time :
up to 17 min*




X4 RM Plus 600/800 VA



Key points

- Line Interactive Technology
- Backup time : up to 17 min*
- 4 to 8 IEC outlets + 2 FR/Schuko outlets
- USB port for automatic closure management
- Phone line/network protection

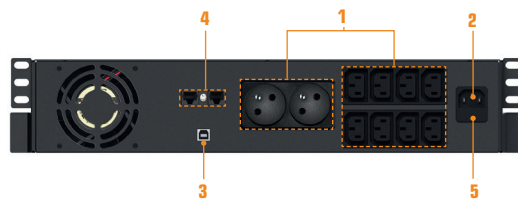

X4 RM Plus 1000/2000/3000

1. Output outlets
2. Power outlets
3. USB communication port
4. Phone/network connectors
5. Fuse

Options

Accessories	Ref
Rack V kit (1U/2U)	61429

General Specifications

General characteristics	600 VA/360 W	800 VA/480 W	1000 VA/600 W	2000 VA/1200 W	3000 VA/1800 W
Technology	Line Interactive				
Backup time (at 50%/70% load)	9 min/5 min	9 min/5 min	17 min/10 min		
Input voltage	220 /230/240 VAC				
Output voltage					
Dimensions (L x W x H) (mm)	230 x 438 x 88 (2U)		300 x 438 x 88 (2U)		460 x 438 x 88 (2U)

Connection

Electrical output	4 IEC outlets, 2 FR/Schuko outlets	8 IEC outlets, 2 FR/Schuko outlets
Tel & network input/output	RJ11/45	

Management/Communication


Port	USB
-------------	-----

Sales information

Warranty	2 years
-----------------	---------

*Depending on the model and the connected load





Business networks - Service Sector and SMEs

The E2 LCD UPS range has been designed to offer your networks and professional IT applications **reliable, high-performance protection** against power problems and dangerous electrical disturbances.



On Line Performance Technology



4 to 6 IEC outlets



LCD control screen



Monitoring software via USB/RS232/SNMP ports



E2 LCD 1000

Key points

- On Line Performance Technology
- 4 to 6 IEC outlets
- USB port for auto-close management
- Phone line/network protection
- LCD control display



E2 LCD 600/800 VA



E2 LCD 1500/2000 VA

1. Uninterruptible power supply (UPS)
2. Phone/network connectors
3. USB port
4. RS232 port
5. Power outlet

General Specifications

	E2 LCD 600	E2 LCD 800	E2 LCD 1000	E2 LCD 1500	E2 LCD 2000
	65348	65349	65350	65351	65352
Power (VA/W)	600 VA/360 W	800 VA/480 W	1000 VA/700 W	1500 VA/1050 W	2000 VA/1400 W
Technology	On Line Performance				
Backup time (at 50%/70% load)*	11 min/6 min	9 min/5 min	8 min/5 min	9 min/5 min	8 min/5 min
Input voltage	220/230/240 VAC				
Output voltage					
Dimensions (L x W x H) (mm)	330 x 100 x 145		350 x 146 x 160	397 x 146 x 205	

Connection

Electrical output	4 IEC outlets	6 IEC outlets
Phone & network input/output	RJ11/45	

Management/Communication

Port	USB	USB, RS232
-------------	-----	------------

Sales information

Warranty	3 years
-----------------	---------

*Depending on the model and the connected load



To find out more





500 to 3000 VA

NEW

Business networks - Service Sector and SMEs

The E3 Evo range, provides **high-quality sine wave output** and **extensive connectivity** for **superior** protection of corporate networks and other sensitive IT equipment, these UPS are ideal for computer applications on a budget.



On Line Performance
Technology



Convertible
Rack/Tower*



4 to 8 IEC outlets



LCD Control Display



Monitoring software
via USB/RS232/
SNMP ports


To find out more



E3 Evo 500 RM (1U)

Key points

- On Line Performance technology with pure sine wave output
- 4 to 8 isolated IEC outlets
- Versatile Rack and Tower format (2U models)
- RS232 and USB communication ports
- SNMP slot for remote management of connected equipment

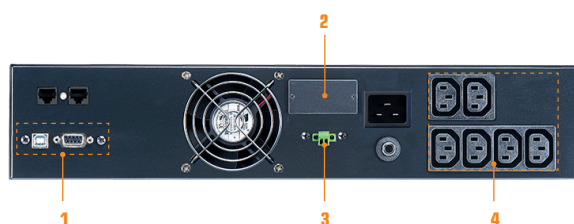

E3 Evo RT 2200 VA

1. RS232/USB communication port
2. SNMP slot
3. Emergency power off (EPO)
4. IEC outlets

Options

Accessories	Ref
SNMP Agent I Pro	61156
SNMP/VPN Agent CS141 Mini-6	61848
Modbus RTU card	61439
Temperature and humidity sensor (EMD)	61452
Rack 2U Kit (1U/2U/3U/W)	61429

General Specifications

	E3 Evo 500 RM	E3 Evo 750 RM	E3 Evo 1200 RT	E3 Evo 2200 RT	E3 Evo 3000 RT
	67036	67037	67038	67039	67040
Power (VA/W)	500 VA/300 W	750 VA/450 W	1200 VA/720 W	2200 VA/1230 W	3000 VA/1800 W
Technology	On Line Performance				
Backup time (at 50%/70% load)*	12 min/ 6 min	8 min/5 min	10 min/6 min	8 min/5 min	8 min/5 min
Input voltage	220/230/240 VAC				
Output voltage	220/230/240 VAC				
Dimensions (W x D x H) (mm)	295 x 438 x 44 (1U)		325 x 438 x 88 (2U)		415 x 438 x 88 (2U)

Connection

Electrical output	4 IEC outlets	6 IEC outlets	8 IEC outlets
Phone & network input/output	RJ 11/45		

Management / Communication

Port	USB, RS232, SNMP
EPO connector	Yes

Sales information

Warranty	3 years
-----------------	---------

*Depending on the model and the connected load



Corporate networks – Service Sector and SMEs

E3 Performance RT UPS are designed for the electrical protection of IT networks and environments. Delivering **high-quality sine wave output** and offering **extensive connectivity**, they are ideal for optimizing the power supply to sensitive IT equipment.



On Line Performance Technology



Convertible Rack/Tower



LCD Rotating Control Display



Monitoring software via USB/RS232/SNMP ports



Extended backup time possible




To find out more



E3 performance RT 1500/2000 VA

Key Points

- On Line Performance Technology
- Up to 9 IEC backup outlets, including 4 programmable
- USB and RS232 ports for automatic shutdown management
- Versatile Rack and Tower format
- Extended runtime options

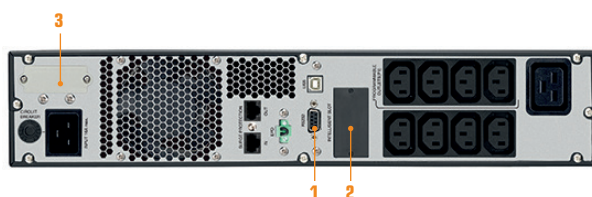

E3 Performance RT 2500/3000 VA

1. RS232 communication port
2. SNMP slot
3. External battery connector

Options

Accessories	Ref	Autonomy module	Ref
SNMP Agent I Pro	61156	Battery Module E3 Performance 800 RT	67401
SNMP/VPN Agent CS141 Mini-6	61848	Battery Module E3 Performance 1100 RT	67402
Modbus card	61439	Battery Module E3 Performance 1500 RT	67405
Temperature and humidity sensor	61452	Battery Module E3 Performance 2000 RT	67406
Rack Kit (1U/2U/W)	61429	Battery Module E3 Performance 2500 RT	67408
Dry contact card	61454	Battery Module E3 Performance 3000/5000 RT	67409
External Bypass BMe 1 RM IEC (1-3k)	61442		
External Bypass BMe 1 RM FR (1-3k)	61443		
External Bypass BMe 2 RM (5k)	61444		

E3 Perf 800 RT	E3 Perf 1100 RT	E3 Perf 1500 RT	E3 Perf 2000 RT	E3 Perf 2500 RT	E3 Perf 3000 RT	E3 Perf 5000 RT
67023	67024	67025	67026	67027	67028	67035

General Specifications

Power (VA/W)	800 VA/ 720 W	1100 VA/ 990 W	1500 VA/ 1350 W	2000 VA/ 1800 W	2500 VA/ 2250 W	3000 VA/ 2700 W	5000 VA/ 4500 W
Technology	On line Performance						
Backup time (at 50%/70% load)*	12 min/7 min	12 min/7 min	13 min/8 min	12 min/7 min	12 min/7 min	10 min/6 min	10 min/6 min
Input voltage	208/220/230/240 VAC						
Output voltage							
Dimensions (L x W x H) (mm)	410 x 438 x 88 (2U)		525 x 438 x 88 (2U)		645 x 438 x 88 (2U)		

Connection

Electrical output	8 IEC outlets	9 IEC outlets	7 IEC outlets, 1 terminal block
Phone & network input/output	RJ11/45		

Management/Communication

Port	USB, RS232, SNMP
------	------------------

Sales information

Warranty	3 years
----------	---------

* Depending on the model and the connected load



Corporate networks & sensitive applications –
Service Sector and SMEs

E3 Pro UPS are dedicated to the electrical protection of networks and **critical loads**. They are available in two versions : **E3 Pro RM** (1U rack-mountable UPS) and **E3 Pro RT** (rack & tower convertible in 2U or 3U formats).



On Line Double
Conversion Technology



Convertible Rack
and/or Tower



Rotating LCD
Control Display



Monitoring
software via
USB/RS232 ports



Extended autonomy
possible




E3 Pro RT 1000/2000/3000 VA

Key Points

- On Line Double Conversion Technology
- 3 to 4 IEC outlets
- Versatile Rack and Tower format
- Extended runtime available
- Separate UPS and battery modules from 5 kVA

Options

Accessories	Ref
SNMP Agent I Pro	61156
SNMP/VPN Agent CS141 Mini-6	61848
Modbus card	61439
Temperature and humidity sensor	61452
Rack Kit (1U/2U/W)	61429
Dry contact card	61454
External Bypass BMe 1 RM IEC (1-3k)	61442
External Bypass BMe 1 RM FR (1-3k)	61443
External Bypass BMe 2 RM (5k)	61444
Smart Charger 24Vdc for E3 Pro 1k RT	61139
Smart Charger 48Vdc for E3 Pro 2k RT	61140
Smart Charger 72Vdc for E3 Pro 3k RT	61141

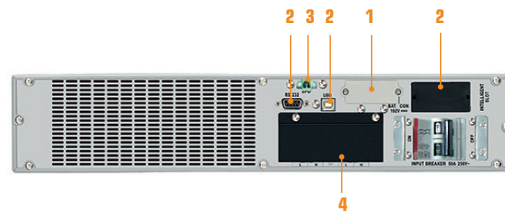

E3 Pro RT 5000/6000 VA

1. External battery connector
2. Communication ports
3. Emergency Power Off (EPO) connector
4. Input/output terminal block

E3 Pro 1000 RM	E3 Pro 1000 RT	E3 Pro 2000 RT	E3 Pro 3000 RT	E3 Pro 5000 RT	E3 Pro 6000 RT	E3 Pro 10k RT
67314	67308	67309	67310	67319	67320	67321

General Specifications

Power (VA/W)	1000 VA/ 800 W	1000 VA/ 900 W	2000 VA/ 1800 W	3000 VA/ 2700 W	5000 VA/ 4500 W	6000 VA/ 5400 W	10000 VA/ 9000 W
Technology	On Line Double Conversion						
Backup (at 50%/70% load)*	8 min/ 5min	10 min/6 min	10 min/6 min	10 min/6 min	20 min/13 min	14 min/10 min	14 min/9 min
Input/output voltage	208/220/230/240 VAC						
Dimensions (L x W x H) (mm)	477 x 438 x 44 (1U)	310 x 438 x 88 (2U)	410 x 438 x 88 (2U)	630 x 438 x 88 (2U)	530 x 438 x 88 (2U)		605 x 438 x 133 (3U)

Bypass

Static bypass	Yes
---------------	-----

Connection

Electrical output	3 IEC outlets	4 IEC outlets	4 IEC outlets, 1 terminal block	Terminal block
-------------------	---------------	---------------	------------------------------------	----------------

Management/Communication

Port	USB	USB, RS232
EPO connector	-	Yes

Sales information

Warranty	3 years	2 years
----------	---------	---------

*Depending on the model and the connected load

To find out more



Networks & sensitive applications - Industrial environments

E7 One RT is a rack-mounted On Line Double Conversion UPS. With a power factor of 1, this range is among the **most efficient, reliable and high-performing** in its category.



E7 One RT 1 to 3 kVA




Key Points

- On Line Double Conversion Technology
- Power factor of 1
- 8 to 9 IEC outlets
- Versatile Rack & Tower format
- UPS and battery modules are separate from 5 kVA

Options

Accessories	Ref
Bypass External BMe 1 RM IEC (1-3k)	61442
Bypass External BMe 1 RM FR (1-3k)	61443
Bypass External BMe 2 RM (5k)	61444
Rack Kit V (1U/2U) (1-3 kVA)	61429
Rack Kit C (2U) (≥ 5 kVA)	61811
SNMP Agent I Pro	61156
SNMP Agent VM CS141 Mini-6	61848
Dry contact card	61454
RS 485 card	61439
Parallel kit (5-10k)	61912

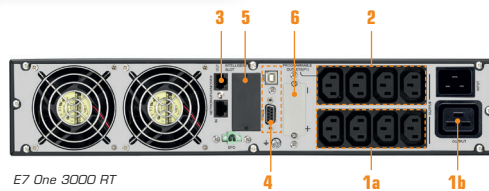

E7 One 3000 RT

- 1.a** 10 A outlets :
connected to essential outputs
- 1.b** 16 A outlets :
connected to an essential output
- 2** Programmable outlets
- 3** RJ11/45 port
- 4** Communication port
- 5** SNMP slot
- 6** External battery connector

E7 One 1000 RT IEC	E7 One 1500 RT IEC	E7 One 2000 RT IEC	E7 One 3000 RT IEC	E7 One 5000 RT	E7 One 6000 RT	E7 One 8000 RT	E7 One 10k RT
67333	67334	67335	67336	67346	67337	67347	67338

General Specifications

Power (VA/W)	1000 VA/ 1000 W	1500 VA/ 1500 W	2000 VA/ 2000 W	3000 VA/ 3000 W	5000 VA/ 5000 W	6000 VA/ 6000 W	8000 VA/ 8000 W	10 kVA/10 kW
Technology	On Line Double Conversion							
Backup (at 50%/70% load)*	10 min/7 min				15 min/10 min		10 min/7 min	
Input/output voltage	200/208/220/230/240 VAC							
Dimensions (L x W x H) (mm)	410 x 438 x 88 (2U)		510 x 438 x 88 (2U)	630 x 438 x 88 (2U)	610 x 438 x 88 (2U)		610 x 438 x 88 (2U)	

Bypass

Bypass statique	Yes
-----------------	-----

Connection

Input	Outlets	Terminal block
Electrical output	8 IEC outlets	9 IEC outlets
Phone & network input/output	RJ11/45	

Management/Communication

Port	USB, RS232, SNMP
EPO connector	Yes
Parallelizable	Up to 3 UPS

Sales information

Warranty	2 years
----------	---------

*Depending on model and connected load
**For inverters from 5 to 10 kVA

To find out more




Networks & sensitive applications - Industrial environments

Equipped with **On Line Double Conversion technology**, the E4 Value UPS delivers a perfect **sine wave output**, ideal for essential applications on a budget.



On Line Double
Conversion Technology



USB & RS232 ports



LED control panel




Remote monitoring
software



E4 Value 1 to 10 kVA

Key Points

- On Line Double Conversion Technology
- 3 to 4 IEC outlets and/or terminal block
- USB and RS232 ports for automatic shutdown management
- Maintenance bypass and SNMP cards available as options



E4 Value 4000/5000 VA

1. RS232 communication port
2. USB communication port
3. Emergency Power Off (EPO) connector
4. Circuit breaker

Options

Accessories	Ref
External Bypass BMe 1 IEC (1-3k)	61440
External Bypass BMe 1 FR (1-3k)	61441
SNMP I Pro RS232 card (models 1-3 kVA)	61830
SNMP I Pro card (models 4-10 kVA)	61156
SNMP/Virtual Environment Agent CS141 Mini-6	61848

General Specifications

	E4 VALUE 1000	E4 VALUE 1500	E4 VALUE 2000	E4 VALUE 3000	E4 VALUE 4000	E4 VALUE 5000	E4 VALUE + 6000	E4 VALUE + 10k
	67417	67425	67418	67419	67426	67420	67656	67657
Power (VA/W)	1000 VA/ 800 W	1500 VA/ 1200 W	2000 VA/ 1600 W	3000 VA/ 2400 W	4000 VA/ 3200 W	5000 VA/ 4000 W	6000 VA/ 5400 W	10000 VA/ 9000 W
Technology	On Line Double Conversion							
Backup (at 50%/70% load)*	10 min/ 6 min	12 min/ 8 min	14 min/ 10 min	10 min/ 7 min	20 min/ 14 min	15 min/ 10 min	12 min/ 8 min	15 min/ 8 min
Input/Output Voltage	200/208/220/230/240 VAC				208/220/230/240 VAC			
Dimensions (L x W x H) (mm)	282 x 145 x 220	397 x 145 x 220		421 x 190 x 318	369 x 190 x 573		369 x 190 x 688	442 x 190 x 688

Bypass

Static bypass	Yes	
Manual bypass	Optional	Yes

Connection

Input	Outlet		Terminal block
Electrical output	3 IEC outlets	4 IEC outlets	4 IEC outlets, 1 terminal block

Management/Communication

Port	RS232	USB, RS232
-------------	-------	------------

Sales information

Warranty	2 years	
-----------------	---------	--

*Depending on the model and the connected load

To find out more



Networks & sensitive applications - Industrial environments

The E4 Pro One UPS range features On Line Double Conversion technology in a tower format, with a **power factor of 1**. It offers premium protection in highly demanding environments where **performance and reliability** are essential under all circumstances.



On Line Double
Conversion Technology



USB & RS232 ports



Parallelizable
up to 3 UPS**



Remote monitoring
software



Extended backup time
(from 2000 VA)


To find out more



E4 Pro One 1 to 10 kVA

Key Points

- On Line Double Conversion Technology
- High-capacity integrated battery charger (1 to 4 A)**
- Power factor 1
- Extended runtime available from 2000 VA
- FR/Schuko + IEC mixed outlets up to 3000 VA

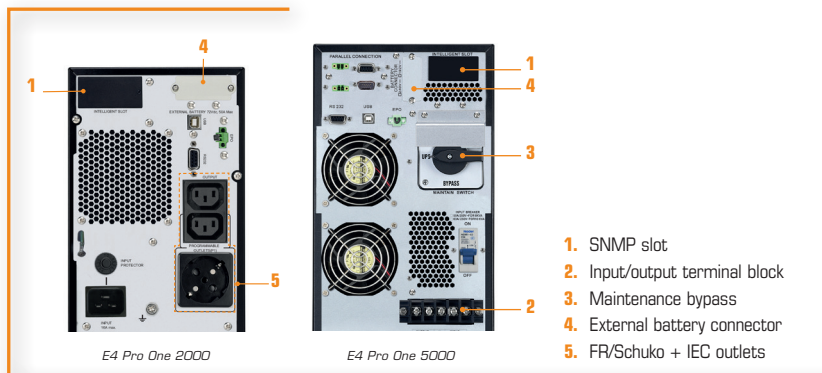

E4 Pro One 2000

E4 Pro One 5000

1. SNMP slot
2. Input/output terminal block
3. Maintenance bypass
4. External battery connector
5. FR/Schuko + IEC outlets

Options

Accessories	Réf
SNMP Agent I Pro	61156
SNMP Agent VM CS141 Mini-6	61848
Dry contacts card (AS 400)	61454
RS485 card	61439
Temperature and humidity sensor	61452
Parallel kit (5-10k)	67910

General Specifications

	E4 Pro One 1000	E4 Pro One 1500	E4 Pro One 2000	E4 Pro One 3000	E4 Pro One 5000	E4 Pro One 6000	E4 Pro One 8000	E4 Pro One 10k
	67689	67690	67691	67692	67629	67630	67631	67632
Power (VA/W)	1000VA /1000 W	1500VA /1500 W	2000VA /2000 W	3000VA /3000 W	5000VA /5000 W	6000VA /6000 W	8000VA /8000 W	10000 VA/10000 W
Technology	On Line Double Conversion							
Backup (at 50%/70% load)*	10min/7min				19 min /13 min	15 min /10 min	14 min /10 min	15 min /10 min
Input voltage	208/220/230/240 VAC							
Output voltage	208/220/230/240 VAC							
Dimensions (L x W x H) (mm)	282 x 145 x 220	397x 145 x 220		421 x 190 x 318	369 x 190 x 688		442 x 190 x 688	

Bypass

Manuel bypass	Yes	
Static bypass	Optional	Yes

Connection

Input	Power supply outlet		Terminal block
Electrical output	1 FR/Schuko outlet, 3 IEC outlets	1 FR/Schuko outlet, 2 prises IEC outlets	Terminal block

Management/Communication

Manuel bypass	USB, RS232, SNMP	
EPO connector	Yes	
Parallelizable	up to 3 UPS	

Sales information

Warranty	2 years	
-----------------	---------	--

*Depending on the model and the connected load
**For models from 5000 VA

Networks & sensitive applications - Industrial environments

The E4 LCD Pro TM range is the **three-phase/single-phase** solution designed to protect sensitive, high-power strategic loads. It offers the essential functions for **optimum electrical safety**.



On Line Double
Conversion
Technology



Three-phase/Single-phase



LCD control display



Remote control
software via USB &
RS232




Extended backup time
possible



E4 LCD Pro TM 10-20 kVA

Key Points

- On Line Double Conversion Technology
- 3-phase input / single-phase output
- Long backup time available
- Integrated manual bypass
- Optional SNMP cards and environmental sensors

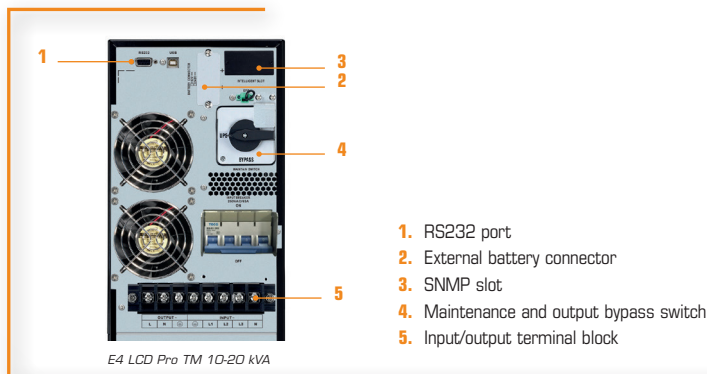

E4 LCD Pro TM 10-20 kVA

1. RS232 port
2. External battery connector
3. SNMP slot
4. Maintenance and output bypass switch
5. Input/output terminal block

Options

Accessories	Ref
SNMP Agent I Pro	61156
Dry contact card	61454
SNMP/VPN Agent CS141 Mini-6	61848
Modbus card	61439
Additional battery cabinets	NC
Temperature & humidity sensor	61452

General Specifications

	E4 LCD Pro 10k TM	E4 LCD Pro 15k TM	E4 LCD Pro 20k TM
	67508	67509	67517
Power (VA/W)	10000 VA/8000 W	15000 VA/12000 W	20000 VA/16000 W
Technology	On Line Double Conversion		
Backup (at 50%/70% load)*	12 min/8 min	8 min/5min	10 min/6 min
Input voltage	3 x 400 VAC (3 Ph + N)		
Output voltage	208/220/230/240 VAC		
Dimensions (L x W x H) (mm)	442 x 190 x 688		815 x 250 x 826

Bypass

Manual bypass	Yes
Static bypass	Yes

Connection

Input	Terminal block
Electrical output	Terminal block

Management/Communication

Port	USB, RS232
EPO connector	Yes

Sales information

Warranty	2 years
----------	---------

*Depending on the model and the connected load

To find out more





M5T
10 to 200 kVA

Critical applications - Industrial & medical environments

The M5T range is the **three-phase solution** designed to protect the most critical high-power loads. It offers all the necessary features to ensure maximum security, even in **sensitive environments**.

Key Points

- On Line Double Conversion Technology
- High efficiency
- Parallelizable and redundant
- Remote control via the network
- Touch and voice control display

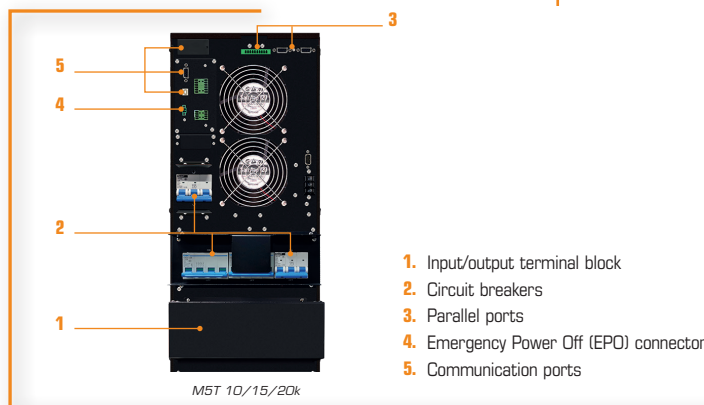

Options

Accessories	Ref
SNMP Agent I Pro	61156
SNMP Agent VM CS141 Mini-6	61848
Dry contact card (AS400)	61454
Isolation transformer	NC
Temperature and humidity sensor	61452
Additional battery cabinet	NC
IP 21 protection	NC
HD Box (20/30/40/60 kVA)	61820

M5T 10K	M5T 15K	M5T 20K	M5T 30K	M5T 40K	M5T 60K	M5T 80K	M5T 100K	M5T 120K	M5T 150K	M5T 180K	M5T 200K
67658	67659	67660	67661	67662	67663	67687	67664	67665	67688	67666	67667

General Specifications

Power (VA/W)	10 kVA/ 10 kW	15 kVA/ 15 kW	20 kVA/ 20 kW	30 kVA/ 30 kW	40 kVA/ 40 kW	60 kVA/ 60 kW	80 kVA/ 80 kW	100 kVA/ 100 kW	120 kVA/ 120 kW	150 kVA/ 150 kW	180 kVA/ 180 kW	200 kVA/ 200 kW
Technology	On Line Double Conversion											
Backup time*	10 to 30 minutes*						Depending on external battery cabinets					
Input voltage	3 x 380/400/415 VAC (3Ph+N)											
Output voltage	3 x 360/380/400/415 VAC (3Ph+N)											
Dimensions (LxWxH) (mm)	627 x 250 x 826			815 x 300 x 1000				979 x 600 x 1600				

Bypass

Static bypass	Yes
Manual bypass	Yes

Connection

Input/Output	Terminal block
--------------	----------------

Management/Communication

Port	USB, RS232, SNMP	
EPO connector	Yes	
Parallelizable	up to 4 UPS	up to 6 UPS

are possible:
consult a sales
representative or
our web support
team.

Sales information

Warranty	1 year
----------	--------

*Depending on the model and the connected load



Many other configurations are possible: consult a sales representative or our web support team.

To find out more



M5T^{HD}

20 to 60 kVA

Critical applications - Industrial & medical environments

The M5T HD range is the **three-phase solution** designed to protect lifts **elevators** equipped with an energy regeneration function, as well as frequency converters.



On Line Double
Conversion Technology



Three-phase



Energy regeneration
loads



High efficiency



Extended backup time
possible



M5T 20/30/40/60 kVA




HD Box



Key Points

- On Line Double Conversion Technology
- Internal resistor bank (HD Box)
- Compatible with motorized systems including braking systems
- High efficiency
- Remote network monitoring and control

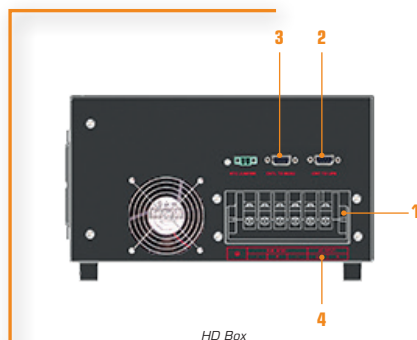

HD Box

1. Terminal block
2. Control port to UPS
3. Control port to HD Box +1
(in the case of parallel HD Boxes)
4. AC power terminals

Options

Accessories	Ref
SNMP Agent I Pro	61156
SNMP Agent VM CS141 Mini-6	61848
Dry contact card (AS400)	61454
Isolation transformer	NC
Temperature and humidity sensor	61452
Supplementary battery cabinet	NC

M5T 20k HV AN10 HD	M5T 30k HV AN10 HD	M5T 40k HV AN10 HD	M5T 60k S HV HD
67686	67683	67684	67685

General Specifications

Power (VA/W)	20 kVA/20 kW	30 kVA/30 kW	40 kVA/40 kW	60 kVA/60 kW
Technology	On Line Double Conversion			
Input voltage	3 x 380/400/415 VAC (3Ph+N)			
Output voltage	3 x 360/380/400/415 VAC (3Ph+N)			
UPS dimensions (L x W x H) (mm)	627 x 250 x 826	815 x 300 x 1000		815 x 300 x 100 (excluding external autonomy module)
HD BOX dimensions (L x W x H) (mm)	750 x 320 x 196			

Bypass

Manual bypass	Yes
Static bypass	Yes

Connections

Input	Terminal block
Output	Terminal block

Monitoring / Communication

Port	USB, RS232, SNMP
EPO connector	Yes
Parallelizable	Up to 4 HD BOX

Sales Information

Warranty	1 year
----------	--------

To find out more



Many other configurations are possible: consult a sales representative or our web support team.



60 to 300 kVA

Critical applications - Industrial & medical environments

The new M6Ti range of UPS is the most reliable solution for the most critical and demanding equipment. It is the new **three-phase** solution designed to protect the most strategic, powerful loads, particularly in disturbed industrial environments.



On Line Double
Conversion Technology



Three-phase



Redundant paralleling
for up to 4 UPS



High efficiency



Extended backup time
possible




M6Ti 100/120 kVA



Key points

- On Line Double Conversion Technology
- Power factor of 1
- Equipped with a Dual Input system
- UPS soft-start function
- Touch-sensitive LCD control display

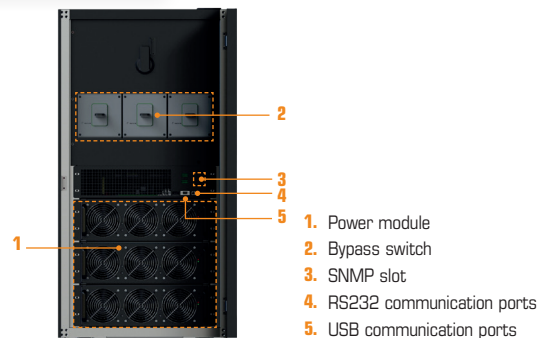

M6Ti 180/200 kVA

Options

Accessories	Ref
SNMP Agent I Pro	61156
SNMP Agent VM CS141 Mini-6	61848
Dry contact card (AS400)	61454
Isolation transformer	NC
Temperature and humidity sensor	61452
Supplementary battery cabinet	NC

M6Ti 60k	M6Ti 80k	M6Ti 100k	M6Ti 120k	M6Ti 180k	M6Ti 200k	M6Ti 240k	M6Ti 300k
69309	69311	69301	69302	69303	69304	69312	69313

General Specifications

Power (VA/W)	60 kVA/60 kW	80 kVA/80 kW	100 kVA/100 kW	120 kVA/120 kW	180 kVA/180 kW	200 kVA/200 kW	240 kVA/240 kW	300 kVA/300 kW
Technology	On Line Double Conversion							
Backup time*	Depending on external battery cabinets							
Input voltage	3 x 380/400/415 VAC (3Ph+N)							
Output voltage	3 x 360/380/400/415 VAC (3Ph+N)							
Dimensions (LxWxH) (mm)	1000 x 320 x 800	1000 x 430 x 1200			1000 x 600 x 1200		1000 x 600 x 1475	

Bypass

Static bypass	Yes
Manual bypass	Yes

Connections

Input/Output	Terminal block
--------------	----------------

Monitoring / Communication

Port	USB, RS232, SNMP
EPO connector	Yes
Parallelizable	up to 4 UPS

Sales information

Warranty	1 year
----------	--------

*Depending on the model and the connected load



To find out more



Many other
configurations
are possible -
contact our sales
department or
consult our web
support.

Critical applications - Industrial & medical environments

The new M6Ti TX range of UPS and the new On Line Double Conversion UPS solution equipped with an **isolation transformer** to ensure **reliable protection** of the most critical equipment.



On Line Double
Conversion
Technology



Three-phase



Redundant paralleling
for up to 4 UPS



High efficiency




Extended backup time
possible



M6Ti TX 180/200 kVA

Key Points

- On Line Double Conversion Technology
- Equipped with an isolation transformer to eliminate electromagnetic disturbance risks
- Power factor 1
- Smart battery charger
- Remote network monitoring and control



M6Ti TX 100/120 kVA

1. Power module
2. SNMP slot
3. RS232 communication port
4. USB communication port

Options

Accessories	Ref
SNMP Agent I Pro	61156
SNMP/VPN Agent CS141 Mini-6	61848
Dry contact card (AS400)	61454
Isolation transformer	NC
Temperature and humidity sensor	61452
Additional battery cabinet	NC

M6Ti TX 60K	M6Ti TX 80K	M6Ti TX 100K	M6Ti TX 120K	M6Ti TX 180K	M6Ti TX 200K
69310	67314	69305	69306	69307	69308

General Specifications

Power (VA/W)	60 kVA/60 kW	80 kVA/80 kW	100 kVA/100 kW	120 kVA/120 kW	180 kVA/180 kW	200 kVA/200 kW
Technology	On Line Double Conversion					
Backup time*	Depending on external battery cabinets					
Input voltage	3 x 380/400/415 VAC (3Ph+N)					
Output voltage	3 x 360/380/400/415 VAC (3Ph+N)					
Dimensions (LxWxH) (mm)	1000 x 600 x 1200	1000 x 430 x 1200	1000 x 480 x 1600		1000 x 600 x 2000	

Bypass

Static bypass	Yes
Manual bypass	Yes

Connections

Input/Output	Terminal block
--------------	----------------

Monitoring / Communication

Port	USB, RS232, SNMP
EPO connector	Yes
Parallelizable	up to 4 UPS

Sales information

Warranty	1 year
----------	--------

*Depending on the model and the connected load

Many other
configurations
are possible:
consult a sales
representative or
our web support
team.

To find out more



Mod3

10 to 100 kVA

Data centers & critical applications

Mod3 solutions provide electrical protection for strategic, **high-power and sensitive loads** that require high **modularity**. Their modular design offers great flexibility in terms of power and configuration. They are available in **single-phase, three-phase/single-phase, and three-phase** versions.



On Line Double Conversion Technology



Single-phase / Three-phase flexibility



Modular design



Rack/Tower format



Extended backup time possible




Mod3 C 10kVA - Tower format

Mod3 C 20kVA - Rack format in preconfigured 19U rack

Key Points

- On Line Double Conversion Technology
- Optimal service continuity with redundancy system
- Scalable up to 10 × 10 kVA modules in a 42U rack bay
- Scalable up to 4 modules (TT version) or up to 2 modules (TM version) in a 19U preconfigured rack bay
- Power factor of 1

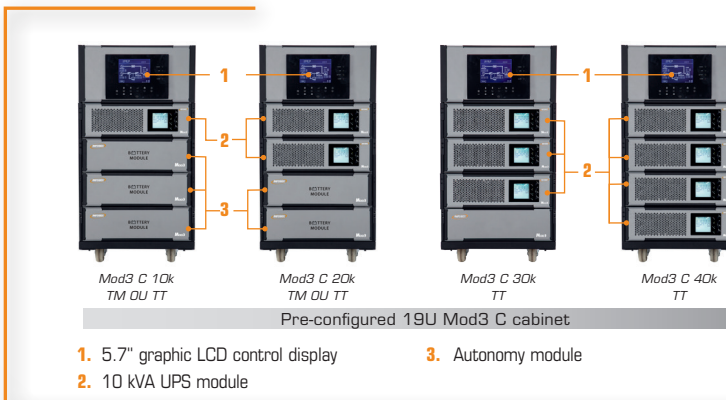

1. 5.7" graphic LCD control display

2. 10 kVA UPS module

3. Autonomy module

Options

Accessories	Réf
SNMP Agent I Pro	61156
SNMP Agent VM CS141 Mini-6	61848
Battery module connection kit	67830
Autonomy connection kit (battery module)	67831
Control module	67835
10" LCD display	67834
Temperature and humidity sensor	61452

General Specifications

	Mod3 C 10k TM	Mod3 C 10k TT	Mod3 C /10 TM	Mod3 C /10 TT
	67727	67725		
Power (VA/W)	10 kVA/10 kW	10 kVA/10 kW	10 to 20 kVA	10 to 40 kVA
Technology	On Line Double Conversion			
Backup time	Configurable; contact us			
Input voltage	3 x 360 VAC/380 VAC/400 VAC/415 VAC (3Ph+N+PE)			
Output voltage	220/230/240 VAC (L+N)	360 VAC/380 VAC / 400 VAC/415 VAC	220/230/240 VAC (L+N)	360 VAC/380 VAC / 400 VAC/415 VAC
Dimensions (L x W x H) (mm)	678 x 418 x 129 (3U)		857 x 443 x 849 (19 U cabinet)	

Bypass

Static bypass	Yes
----------------------	-----

Connections

Input	Terminal block
Output	Terminal block
Tel & network input/output	RJ11/45

Monitoring / Communication

Port	USB, RS232, SNMP		
EPO connector	Yes		
Parallelizable	Up to 10 modules in 42U rack	Up to 2 modules in a 19U rack	Up to 4 modules in a 19U rack

Sales Information

Warranty	1 year
-----------------	--------

Many other configurations are possible - contact our sales department or consult our web support.

To find out more



Mod5T&E

20 to 600 kVA

Data Centers & Critical Applications

Mod5T and Mod5T E UPS are the most **reliable** and **suitable solution** for data centers and the **most critical and demanding equipment**. Their **modular design** makes them highly available, flexible, economical, and easy to maintain.



On Line Double
Conversion
Technology



Three-phase



Modular design



Parallelizable
up to 2 UPS




Extended backup time
possible



Famille Mod5T E

Key Points

- On Line Double Conversion Technology
- Redundant power backup protection (N + X)
- Configurable with 20 / 30 / 50 / 60 kVA power modules
- Mod5T cabinets available in 30U and 42U formats
- Low MTTR : easy and secure maintenance

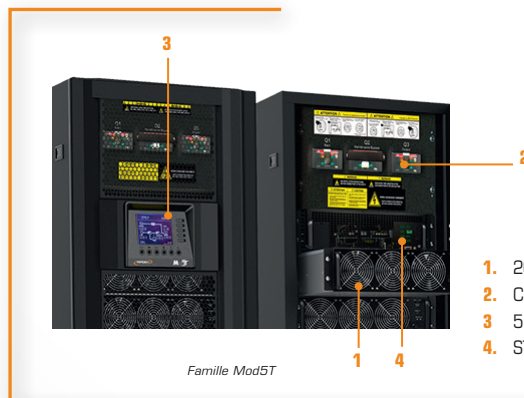

Famille Mod5T

1. 20, 30, 50 or 60 kVA power module
2. Circuit breakers
3. 5.7" graphic LCD control display
4. STS / Static Transfer Switch module

Options

Accessories	Ref
SNMP I Pro Agent	61156
SNMP Agent VM CS141 Mini-6	61848
Temperature and humidity sensor	61452
Programmable communication card	67816
10" touch screen	67817

General Specifications

	Mod5T E S (15U/29U)	Mod5T S (30U)	Mod5T S (42U)
Power (VA/W)	from 20 to 90 kVA	from 20 to 180 kVA	from 20 to 600 kVA
Technology	On Line Double Conversion		
Input voltage	3 x 380 VAC/400 VAC/415 VAC (3Ph+N)		
Output voltage			
Dimensions (L x W x H) (mm)	1100 x 515 x 761 (15U without battery) 1100 x 515 x 1522 (29 U with battery cabinet)	1100 x 600 x 1475 (30U) 1100 x 600 x 2010 (42U)	1100 x 1200 x 2010 (42U models 420-500-600/60 S)

Bypass

Manual bypass	Yes
Static bypass	Yes

Connections

Input	Terminal block
Output	Terminal block

Management/Communication

Port	USB, RS232, SNMP
Parallelizable	Up to 2 UPS

Sales Information

Warranty	1 year
----------	--------

To find out more



Many other
configurations
are possible -
contact our sales
department or
consult our web
support.



5 kW to 45 kW

PV Systems & Long Backup – Commercial & Service Sector

G1 and G1 Solar MPPT UPS offer **long electrical backup** for non-sensitive applications where **service continuity** is critical – such as security lighting, lifts, air conditioning, ATMs, or autonomous handling systems (RTG).



High Frequency Sine Wave Technology



Parallelizable up to 9 UPS



LCD display



Ports USB & RS232



Extended backup time possible

To find out more




G1 5kW in 19" bay



Key Points

- Converter/charger function in 19" rackmount format
- Pure sine wave output (power factor = 1)
- High-capacity charger: up to 60 A per module, total 540 A for external battery charging
- Compatible with single-phase or three-phase applications
- Solar panel input (MPPT model)

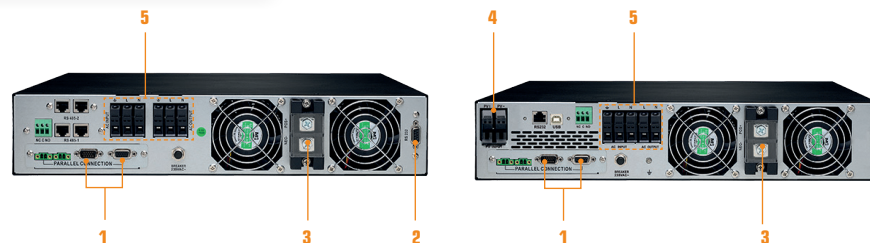

G1 5kW

G1 Solar MPPT 5kW

1. Parallel connection port
2. RS232 communication port
3. Battery input terminal block
4. PV input terminal block
5. AC grid input/output terminal block

General Specifications

	G1 5 kW	G1 Solar MPPT 5 kW
Power (VA/W)	5000 VA/5000 W	5000 VA/5000 W
Backup time	Configurable – contact us	
Input voltage	220/230/240 VAC	
Output voltage	220/230/240 VAC	
Dimensions (L x W x H) (mm)	400 x 438 x 88 (2U)	

Connections

Input	Terminal block	Terminal block / Solar input
Output	Terminal block	

Management/Communication

Port	USB, RS232, SNMP, Parallel port	USB, Parallel port
Parallelizable	Up to 9 UPS	

Sales Information

Warranty	2 years	
----------	---------	--



Accessories



Communication solutions	36
Virtual network management	37
Rack-mountable power distribution units	38
External maintenance bypass	39
Power transfer system	42
External battery charger	43

Communication Software & SNMP Agents

Communication Solutions



Local Management - Key Features

- InfoPower / Upsilon 2000 / Power Master: automatic remote shutdown software
- Remote control of equipment power supply via UPS communication port
- Scheduled UPS startup/shutdown, event logging, daily maintenance, etc.
- Additional communication options: EMD sensor, dry contact card (AS400), Modbus card...



Carte SNMP I Pro

Network Management - Key Features

- SNMP agent: connects the UPS to the enterprise network
- Multi-UPS management via local network
- UPS status monitoring
- Secure shutdown configuration

All Infosec UPS equipped with USB or RS232 ports can use the shutdown software

Available Agents & Installation Type

	SNMP I Pro	SNMP I Pro RS232 (external)
	61156	61830
Image		
Compatibility	E3 EVO E3 Performance RT E3 Pro RM / RT E4 LCD Pro / TM E4 Pro One E7 One RT Mod3 ModST / ModST E M5T/M5T HD M6Ti/M6Ti Tx	All UPS equipped with an RS232 port
Type of installation	Built-in	External (RS232 port)

Operating systems for software solutions

Software Compatibility

Windows	Windows Family
Linux	Redhat linux 8,9 (32bit); Fedora 5 (32bit); RedHat Enterprise AS3, AS5, AS6 (32bit); SUSE 10,11.x,12.x (32bit); Ubuntu 8.X; 9.X, 10.X, 12.X, 14.X, 16.X, 18.X (32bit); OpenSUSE 11.2, 12.X (32bit); Debian 5.x, 6.x (32bit); CentOS 5.x, 6.x, 7.x, 8.x (32bit); RedHat Enterprise AS6 (64bit); SUSE 10 (64bit); Ubuntu 10.X (64bit); OpenSUSE 11.2 (64bit); Debian 6.x (64bit); Ubuntu; 8.X, 9.X, 10.X, 12.X, 14.X, 16.X, 18.X (64bit); CentOS 5.x, 6.x, 7.x, 8.x (64bit)
Mac	Mac OS 10.6 / 10.7 / 10.8 / 10.9 / 10.10 / 10.11 / 10.12 / 10.13 / 10.14 / 10.15 (x64-bit)
Solaris	10 for x 86

Updates can be downloaded from the website.



To find out more



SNMP VM CS141 Mini-6 Agent & RCCMD Licence

Virtual Network Management


For On Line UPS connected to **virtualized networks such as vmWare®**, an **SNMP** agent combined with the **RCCMD** software allows the start-up and shutdown of virtual servers and associated devices to be controlled.



RCCMD Client Software

2 in 1 solution :

- SNMP VM CS141 Mini-6 card: enables communication with virtualisation systems (VMware®, Hyper-V).
- RCCMD software: manages shutdown of protected virtual servers connected to an INFOSEC UPS with an SNMP card.

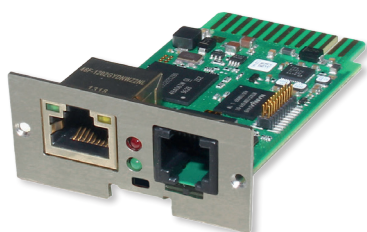

SNMP VM CS141 Mini-6 Card

Virtual Network - Key Features

- General UPS status monitoring
- Scheduled UPS start-up and shutdown
- Alert messages (via email)
- Shutdown of running applications
- Shutdown of virtual servers
- Shutdown of physical servers

General Specifications

	SNMP VM CS141 Mini-6	RCCMD Client Software
	61848	61143
Compatibility	All On Line UPS models equipped with a dedicated («intelligent slot») : E3 EVO, E3 Performance, E3 Pro RM / RT, E4 Value 4000 VA and +, E4 LCD Pro, E4 Pro One, E7 One, E4 Pro TM, M5T, Mod3, Mod5T / Mod5T E M6Ti/M6Ti Tx	
Type of installation	Built into the UPS	Downloadable software
Environment	Windows, Linux, Mac, VMWare ESXi (and old ESX), Microsoft Hypervisor and CITRIX.	

To find out more



P D U

Rack-Mountable Power Distribution Units

PDUs are **rack-mountable power strips** that allow you to connect all your electrical equipment in patch cabinets or server racks. Available in various versions, they adapt to your needs, and their rack format is designed for integration in **19" rack bays**.



Rackable*



Vertical mounting*



French outlets



Up to 2.5 m cable




Wall mounting

To find out more



Standard PDUs

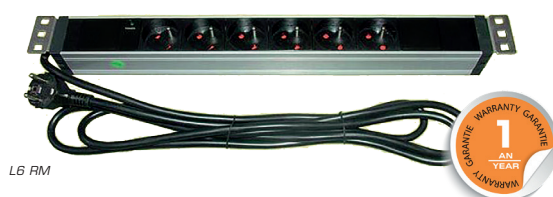


L6 RM


Key Features

- LED indicators
- Safety shutters
- Mounting hardware included for rack installation
- Fixed or adjustable mounting brackets
- Custom PDUs designed for UPS output connection

Special PDUs

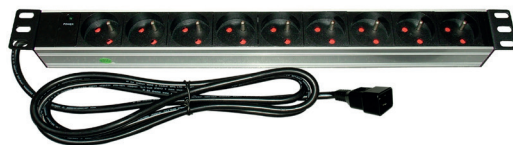

L9 RM C20



L20 VM plus

Standard PDUs

General Specifications

Power	16 A/3680 W				
Voltage	230 VAC 50/60 Hz				
Output outlets	4 FR outlets	6 FR outlets	6 FR outlets	8 FR outlets	9 FR outlets
Dimensions (L x W x D) (mm)	44.4 x 255 x 44.4	45 x 485 x 45			
Cable length (m)	1,8	2,5			
Mounting	Rack (horizontal)				

Sales information

Warranty	1 year
----------	--------

Special PDUs

General Specifications

Power	10 A/2300 W	16 A/3680 W	10 A/2300 W	16 A/3680 W	2x 16 A/3680 W	
Voltage	230 VAC 50/60 Hz					
Output outlets	8 FR outlets	9 FR outlets	10 IEC outlets	10 IEC outlets	18 FR outlets	20 IEC outlets
Dimensions (W × D × H) (mm)	45 x 485 x 45				1100 x 45 x 45	
Cable length (m)	2,5	2,5	2,5	2,5	2	2
Mounting	Horizontal rack mount				Vertical	
Power cable	power cable C14 (IEC-10 A)	power cable C20 (IEC-16 A)	power cable IEC C14 (10 A)	power cable IEC C20 (16 A)	power cable with M5 eyelet lug	

Sales information

Warranty	1 year
----------	--------

*Depending on the model selected



External Maintenance Bypass

BMe external maintenance bypass units are designed to simplify **maintenance operations** on UPS systems from **1 to 3 kVA**, while maintaining **service continuity**.



FR outlets



IEC Outlets



Schuko Outlets



UK Outlets



NEMA Outlets



BMe 1 FR/Schuko Tower

Key Features

- 4 to 9 outlets for easy use
- FR, IEC, Schuko, UK and NEMA* outlets
- Quick and easy installation



BMe 1 FR/Schuko Tower

1. UPS input outlets
2. UPS output outlets
3. Load output outlets
4. Bypass transfer switch

Packaging Contents

Input cable (BMe1 Tower -> UPS)	
1K	IEC 16 A - IEC 10 A
2K	IEC 16 A - IEC 10 A
3K	IEC 16 A - IEC 16 A
Output cable (UPS -> BMe1 Tower)	
1K	IEC 10 A - IEC 16 A
2K	IEC 10 A - IEC 16 A
3K	Bare wires for service terminal block - IEC 16 A

BMe 1 FR	BMe 1 IEC	BMe 1 SCHUKO
----------	-----------	--------------

General specifications

	61441	61440	61446
Rated current		16 A	
Nominal voltage	208/ 220/ 230/ 240 VAC		
Power supply	A 2 P+T - IEC 16 A power cable		
UPS input	1 & 2 kVA	1 IEC 16 A - IEC 10 A cable	
	3 kVA	1 IEC 16 A - IEC 16 A cable	
UPS output	1 & 2 kVA	1 IEC 10 A - IEC 16 A cable	
	3 kVA	1 IEC 16 A - IEC 16 A cable	
Dimensions (L x W x H) (mm)	180 x 200 x 60		

Connection

Electrical output	4 French outlets, 2 P+T, 16 A 250 V	8 IEC 10 A outlets + 1 IEC 16 A outlet	4 Schuko outlets 2P+T, 16 A 250 V
-------------------	--	---	--------------------------------------

Sales information

Warranty	2 years
Compatibility	All UPS from 1 to 3 kVA in tower format

*Depending on the model selected



To find out more



External Maintenance Bypass

During maintenance operations on 1 to 3 kVA UPS systems, the BMe 1 external maintenance bypass allows, via a **rotary switch**, **continuous power supply** of connected equipment.



Rack version



FR outlets



IEC outlets



Schuko outlets



UK outlets



BMe1 IEC RM

Key Features

- 4 to 6 outlets for easy use
- FR, IEC, Schuko, UK and NEMA* outlet types
- Quick and easy installation
- Energy saving with "master/slave" mode
- Supplied with rack-mounting hardware (for 19" rack)



BMe 1 FR/Schuko RM

1. Slave output outlets (for peripherals)
2. Master output outlets (for computer)
3. Master/slave function
4. Bypass transfer switch

Packaging Contents

Input cable (BMe1 RM -> UPS)	
800 VA	IEC 16 A - IEC 10 A
2K	IEC 16 A - IEC 10 A
3K	IEC 16 A - IEC 16 A
Output cable (UPS -> BMe1 RM)	
800 VA	IEC 10 A - IEC 16 A
2K	IEC 10 A - IEC 16 A
3K	IEC 16 A - IEC 16 A

General specifications

Rated current	16 A max
Nominal voltage	208/ 220/ 230/ 240 VAC
Power supply	A 2 P+T - IEC 16 A power cable
UPS input	800 VA 2 & 3 kVA
UPS output	800 VA & 2 kVA 3 kVA
Dimensions (D x W x H) (mm)	88 x 440 x 60

Connection

Number and type of outlets	4 French outlets 2 P+T, 16 A 250 V	5 IEC 10 A outlets + 1 IEC 16 A outlet	4 Schuko outlets 2P+T, 16 A 250 V
----------------------------	---------------------------------------	---	--------------------------------------

Sales information

Warranty	2 years
Compatibility	All UPS from 1 to 3 kVA 19" rack-mountable version

To find out more



External Maintenance Bypass

BMe 2 and 3 external maintenance bypass units are designed to facilitate **maintenance operations** on UPS systems from **5 kVA and above**, while ensuring **continuous power supply** to connected equipment.



Rack format



Terminal block input/output



Wall-mounting option



BMe 2 RM

Key Features

- Continuous power supply to connected equipment during maintenance
- Practical 19" rack format
- Supplied with brackets for rack or wall mounting
- Controlled via UPS



BMe 2 RM

1. Terminal block input/output
2. Input circuit breaker
3. External maintenance bypass switch
4. Signal output control connector

BMe 2 RM	BMe 2 TM RM	BMe 3 TM RM
61444	61445	61458

General Specifications

Rated current	63 A/phase		
Max voltage	600 VAC		
Frequency	50 or 60 Hz		
Insulation voltage	690 VAC		
Protection	Surcharge		
Dimensions (W × D × H) (mm)	165 x 440 x 88 (2U)	165 x 440 x 88 (2U)	196 x 438 x 88 (2U)
Compatibility	E7 One RT UPS from 3 to 10 kVA	UPS up to 10 kVA	UPS from 15 to 20 kVA TM

Connections

Electrical output	Terminal block (Ph-N+T)
-------------------	-------------------------

Sales Information

Warranty	2 years
----------	---------

To find out more





Automatic Transfer Switch

Thanks to its dual input, this **automatic transfer switch** is designed to manage and control two different power sources. If the primary source fails, the secondary source **automatically takes over**.



1U Rack



IEC outlets

USB & RS232
portsRemote control
software


ATS

Key Features

- Designed for 1 to 3 kVA UPS systems
- 2 separate and independent power sources
- Communication ports: USB, RS232, Dry Contacts, SNMP
- 1U Rack version

Options

Accessories	Ref
SNMP Agent I Pro	61156

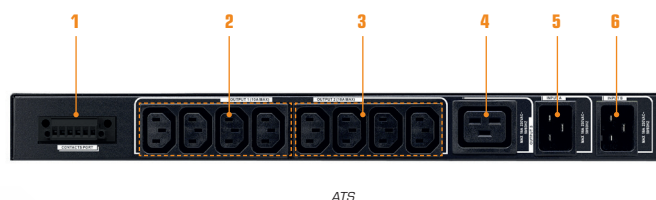

ATS

1. Dry contact connector
2. Output outlets "Output 1" (IEC 10 A)
3. Output outlets "Output 2" (IEC 10 A)
4. Output outlets "Output 3" (IEC 16 A)
5. Input source A
6. Input source B

General Specifications

Input voltage	220/230/240 VAC
Output voltage	
Dimensions (W x D x H) (mm)	330 x 483 x 44 (1U)

Connection

Input	2 x IEC-C20
Max input current	16 A
Output	8 x IEC-C13/1 x IEC-C19
Max output current	10 A for IEC-C13 outlets/16 A for IEC-C19 outlet

Management/Communication

Port	USB, RS232, SNMP
------	------------------

Sales Information

Warranty	2 years
----------	---------

To find out more



Smart Charger S

External Battery Charger

The Smart Charger S is an **external charger** designed to increase runtime extension capabilities of On Line UPS systems by increasing battery charging current.



Fast charging of autonomy extensions



Smart Charger S 24/48/72 V

Key Features

- Powerful external charger supporting configuration of up to 4 battery extension modules
- Compatible with E3 Pro, E3 Performance, E4 LCD Pro, E7 One RT
- Available in 3 output voltages (24 / 48 / 72 V)
- Selectable output charging current



Smart Charger S 24/48/72V

1. Power ON/OFF switch
2. Battery connector
3. Power input outlets
4. Charging current selection button

General Specifications

	Smart Charger S 24 V	Smart Charger S 48 V	Smart Charger S 72 V
	61139	61140	61141
Output voltage	24 V	48 V	72 V
Dimensions (L x W x H) (mm)	220 x 150 x 83		

Input

Voltage	230/240 VAC
Frequency	50/60 Hz

Output

Max Power	144 W	288 W	432 W
Charging current	6 A ± 0.6 A (1 A/2 A/4 A/6 A selectable)		

Sales Information

Warranty	2 years
----------	---------

To find out more



Regulators



Mobile homes and household appliances

45



Mobile Homes & Household Appliances

The R1 USB is an automatic voltage regulator designed to protect small **sensitive electrical and electronic equipment**.



Relay Technology



FR/Schuko Outlets



USB Charger



R1 USB 600/1000/1500 VA

Key Features

- Relay Technology
- Effective protection against sudden voltage fluctuations
- Equipped with a USB charger



R1 USB 600/1000/1500 VA

1. FR/Schuko outlets
2. USB charger
3. On/Off button
4. LED indicator lights

General Specifications

	R1 USB 600	R1 USB 1000	R1 USB 1500
Power (VA/W)	600 VA/300 W	1000 VA/500 W	1500 VA/750 W
Technology	Relay type		
Voltage range	184-284 VAC		
Output voltage	230 VAC $\pm$ 10 %		
Dimensions (L x W x H) (mm)	180 x 95 x 119	180 x 90 x 119	

Connection

Electrical output	3 FR/Schuko outlets
Charger	USB

Warranty

Warranty	2 years
----------	---------

To find out more



International presence



Connected internationally

+100 country

The INFOSEC UPS SYSTEM™ brand is now represented in over 100 countries thanks to loyal distribution partners.

INFOSEC UPS SYSTEM™ products are distributed in France and worldwide via several distribution channels (IT, Electrical, Retail and Web) which are addressed by INFOSEC sales teams through wholesalers, distributors and integrators.

+33 (0)2 40 76 15 60
sales@infosec.fr
Sales department

Notes

Key Notes

This image shows a single sheet of white paper with horizontal ruling lines. The lines are evenly spaced and run across the width of the page. There are no margins, text, or other markings on the paper.

Product references

Products / Services :	Power	Ref	Page
1.			
2.			
3.			
4.			
5.			
6.			



L'Énergie Sans Limite !
Safe Energy for Life !



Since 2007, INFOSEC Communication SAS has made quality, customer satisfaction, and environmental commitment central to its strategy, supported by an **ISO 9001** and **ISO 14001** certified management system.



In January 2025, INFOSEC UPS SYSTEM™ was awarded the EcoVadis® Bronze Medal, a prestigious recognition that reflects the company's ongoing commitment to Corporate Social Responsibility (CSR).

INFOSEC COMMUNICATION SAS

15 rue du Moulin - 44880 SAUTRON - FRANCE

Tel: +33 (0)2 40 76 13 94

France: commercial@infosec.fr

Export: sales@infosec.fr

Hotline

After-sales support

+33 (0)2 40 76 15 82

hotline@infosec.fr

Browse our catalogue
wherever you are !



This catalogue is printed on paper from sustainably managed forests and controlled sources. Designed and manufactured in France, it uses 100% vegetable-based, environmentally-friendly inks.

